


NR31P4-4


4CH NVR

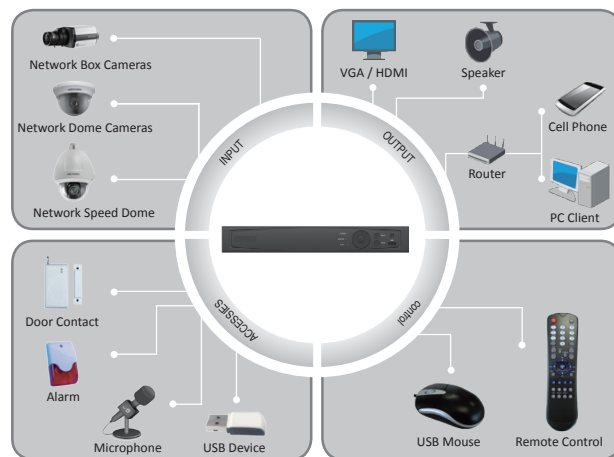

Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- HDD quota and group management
- 4 independent PoE network interfaces are provided

Interface

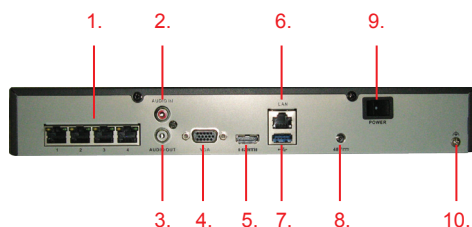

1. Network Interfaces with PoE function
2. Audio In
3. Audio Out
4. VGA Output
5. HDMI Interface
6. LAN Network Interface
7. USB Interface
8. 100~240VAC Power Input
9. Power Switch
10. GND

Specifications

NR31P4-4	
Video/Audio input	
IP video input	4-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	25Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio output	
Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame rate	Main stream: 50 fps (P) / 60 fps (N) Sub-stream: 50 fps (P) / 60 fps (N)
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view / Playback resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	4-ch @ 1080P
Hard disk	
SATA	1 SATA interface for 1 HDD
Capacity	Up to 4TB for each disk
External interface	
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB interface	1 × USB 2.0 and 1 × USB 3.0
PoE	
Interface	4 independent 100 Mbps PoE network interfaces
Max. Power	50W
Supported standard	AF and AT
Others	
Power supply	48V DC
Consumption(without hard disk)	≤ 10W
Working temperature	-10 °C ~ +55 °C (+14 °F ~ + 131 °F)
Working humidity	10 % ~ 90 %
Chassis	1U chassis
Dimensions(W × D × H)	315 × 230 × 45mm (12.4 × 9.1 × 1.8 inch)
Weight(without hard disk)	≤ 1 Kg (2.2 lb)